


Additional batten for large column fixing (Optional)

Timber Batten fixed to existing column on site by others

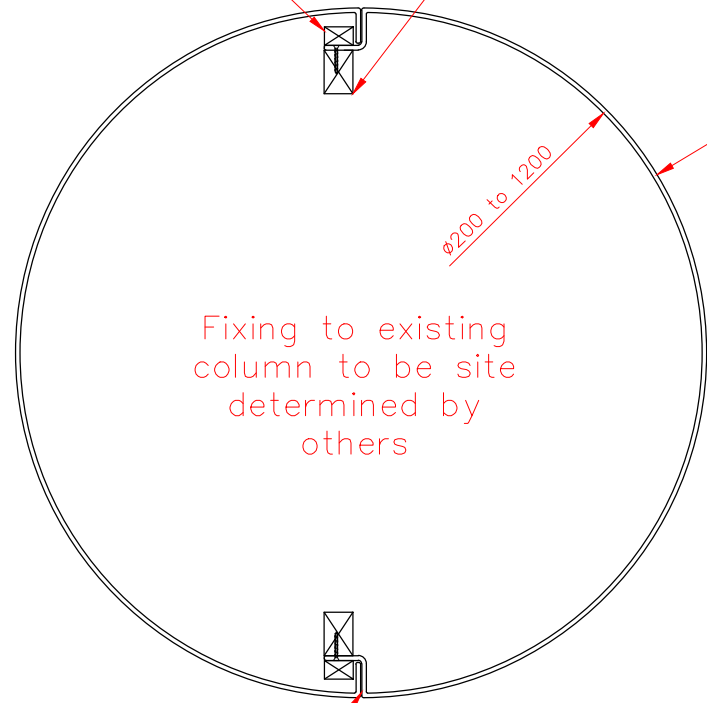

Bonded joint


TYPICAL INSTALLATION

AVAILABLE IN UP TO 4m LENGTHS
(Depending on diameter)

4mm thick GRP Casing

GRP casing with smooth white finish

Recommended adhesive for bonding is Everbuild polyuathane 40

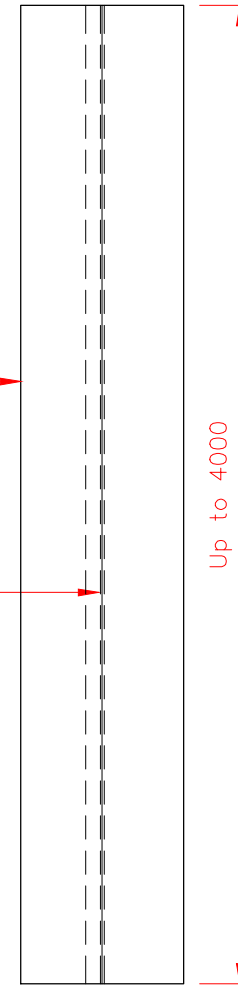

ELEVATION

Notes :
Tourniquet strappings required to hold column together whilst adhesive is setting.

Ensure column is protected prior to attaching the strap to avoid any damage to surface.

PENDOCK

Pendock
Halesfield 19, Telford, Shropshire, TF7 4QT.
Tel: +44 (0) 1952 580590 Fax: +44 (0) 1952 587805
E-mail: technical@pendock.co.uk
Web: www.pendock.co.uk

THIS DRAWING MUST NOT BE SCALED

© COPYRIGHT TP MANUFACTURING
PENDOCK, HALESFIELD 19, TELFORD, SHROPSHIRE TF7 4QT
TEL: +44 (0) 1952 580590 FAX: +44 (0) 1952 587805
email: sales@pendock.co.uk or technical@pendock.co.uk

GRP CASINGS

DRAWN BY	SCALE	DATE
SL	1: 4&20	9/3/15