


Additional battern for large column fixing (Optional)

Timber Batten fixed to existing column on site by others

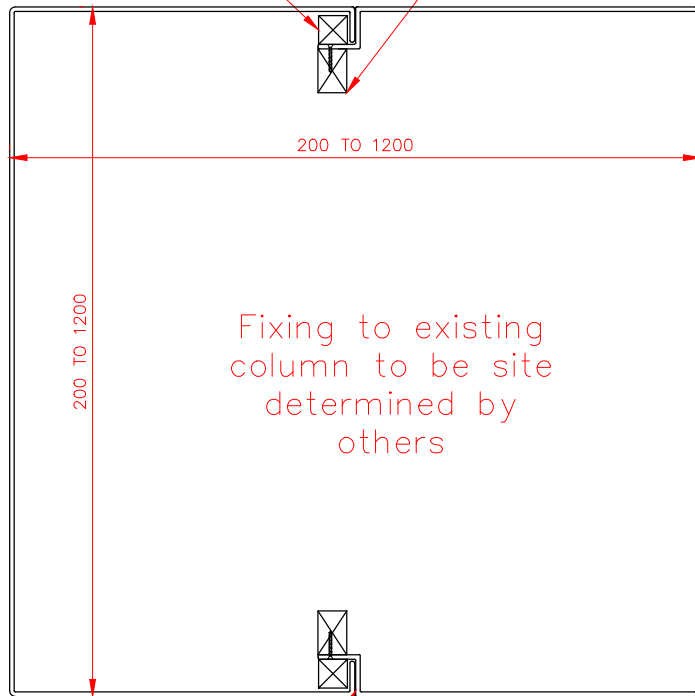

Bonded joint


TYPICAL
INSTALLATION

AVAILABLE IN UP TO 4m
LENGTHS (Depending on
diameter)

4mm thick
GRP Casing

GRP casing
with smooth
white finish

Recommended adhesive
for bonding is Everbuild
polyuathane 40

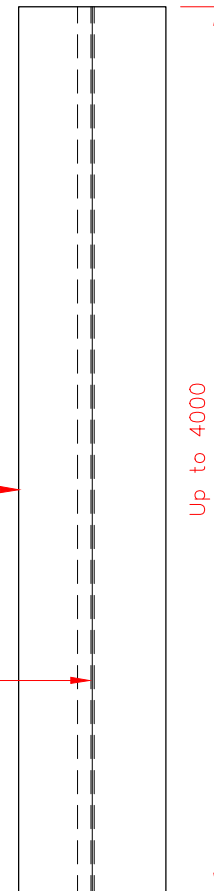

ELEVATION

Notes :
Tourniquet strappings required to hold
column together whilst adhesive is
setting.

Ensure column is protected prior to
attaching the strap to avoid any
damage to surface.

PENDOCK

Pendock
Halesfield 19, Telford, Shropshire, TF7 4QT.
Tel: +44 (0) 1952 580590 Fax: +44 (0) 1952
587805
E-mail: technical@pendock.co.uk
Web: www.pendock.co.uk

THIS DRAWING MUST NOT BE SCALED

© COPYRIGHT TP MANUFACTURING
PENDOCK, HALESFIELD 19, TELFORD, SHROPSHIRE TF7 4QT
TEL: +44 (0) 1952 580590 FAX: +44 (0) 1952 587805
email: sales@pendock.co.uk or technical@pendock.co.uk

GRP CASINGS

| | | |
|----------|---------|--------|
| DRAWN BY | SCALE | DATE |
| SL | 1: 4&20 | 9/3/15 |