

Pendock, Halesfield 19, Telford, Shropshire, TF7 4QT.
 T 01952 580590
 F 01952 587805
 E sales@pendock.co.uk
 W www.pendock.co.uk

THIS DRAWING MUST NOT BE SCALED

© COPYRIGHT PENDOCK LTD.

THIS DRAWING MUST BE REVIEWED IN CONJUNCTION WITH ANY SUPPORTING QUOTATIONS REFERENCED.
 THE DESIGN DETAILED IN THIS DRAWING FORMS PART OF A PROPOSED SOLUTION.
 ALL QUANTITIES AND MEASUREMENTS MUST BE CHECKED IN CONJUNCTION WITH SUPPORTING QUOTATION AGAINST CLIENTS REQUIREMENTS. SPECIFIC CONSIDERATION SHOULD BE GIVEN TO DIMENSIONAL ACCURACY (INCLUDING INT. CLEARANCE).
 PENDOCK LTD. SHALL NOT BE LIABLE FOR ANY CLAIM ARISING OUT OF THE USE OF THIS DESIGN IN A SCHEME NOT APPROVED IN WRITING BY PENDOCK LTD.
 THIS DRAWING MUST NOT BE LENT OR COPIED, AND THE DESIGN MUST NOT BE COPIED. COPYRIGHT AND DESIGN RIGHT IN THIS DRAWING RESTS WITH PENDOCK LTD.
 THE CUSTOMER OR ITS CONTRACTOR OR AGENT IS RESPONSIBLE FOR VERIFYING THE ACCURACY AND SUITABILITY OF THE DESIGN IN THIS DRAWING.
 PENDOCK LTD. STANDARD TERMS AND CONDITIONS, DETAILED ON SUPPORTING QUOTATIONS APPLY.

NOTES

REV	DATE	BY	APP

GENERAL INFORMATION ALL DIMENSIONS IN MM UNLESS OTHERWISE STATED	 THIRD ANGLE PROJECTION
--	---

DATE 27.8.14	DRAWN SL	CHECKED	APPROVED
-----------------	-------------	---------	----------

CLIENT/PROJECT

**CL Columns
Circular**


PROJECT DETAILS

**Pendock Column
Casings**


SCALE nts	SHEET 3 OF 4	A3
DWG No.		REV

Fitment Guide

Female Column Section
first fix
(Internal flange to flange size
smaller than male section)

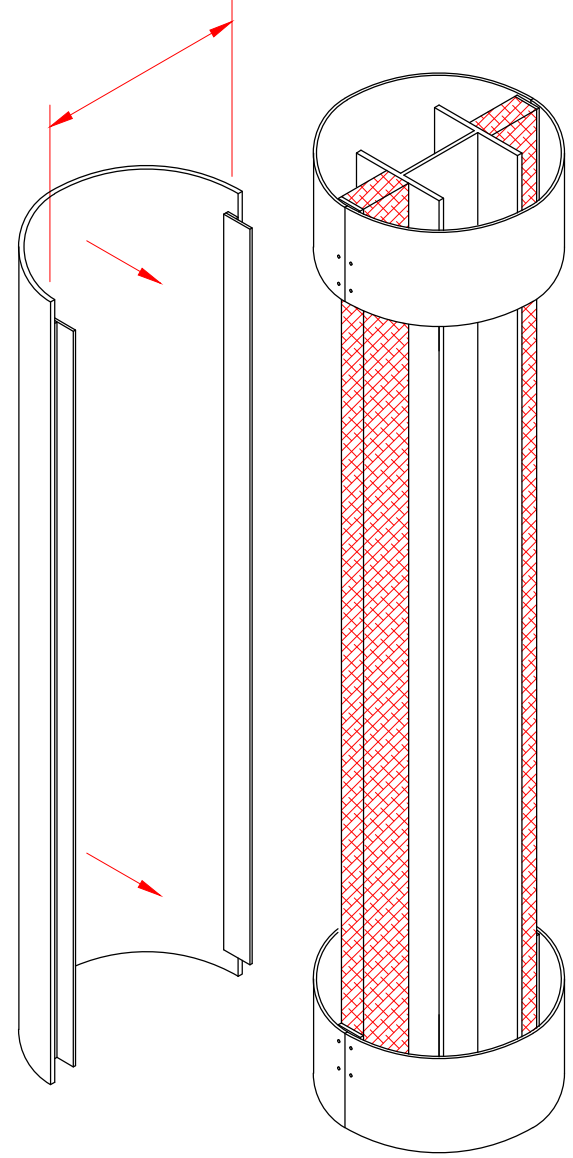

Male Column Section
Fixed over Female section
(Internal flange to flange size
greater than Female section)

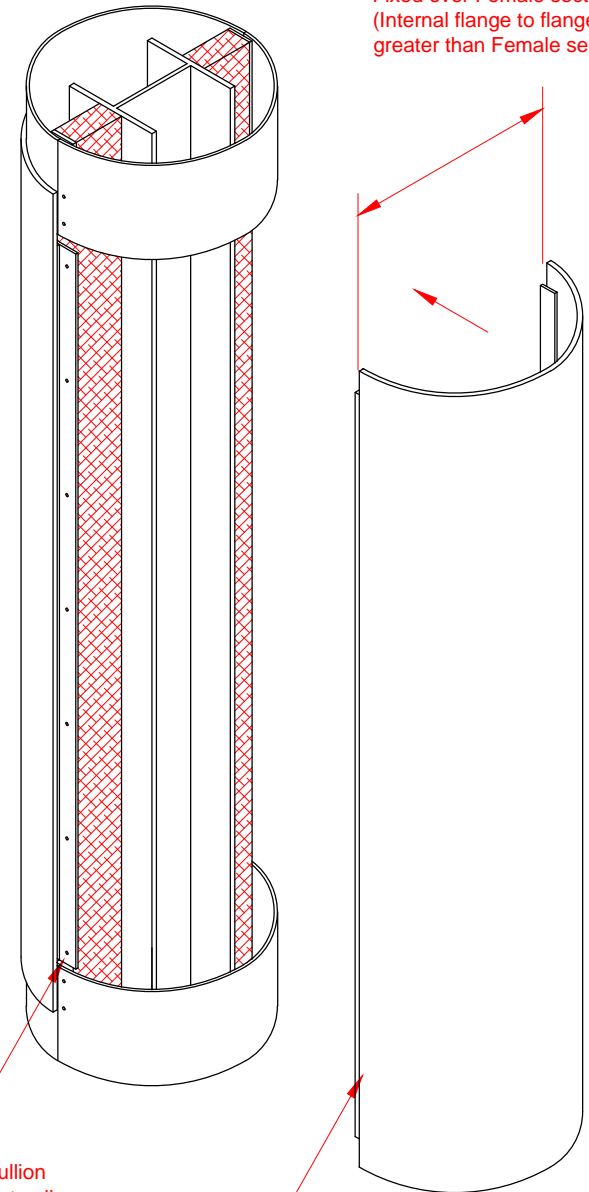

Female casing fixed to mullion
(fixings to be countersunk to allow
over fitment of Male casing)

Male casing located over female
flange and fixed into mullion
through female joint.
(Avoid the same drilling position
as the female section)

Feature Joints: (See Sheet 4)

J2 Black uPVC has a MDF packing strip
supplied with double sided tape.

J3 Aluminium Top Hat fixed using
countersunk screws (optional internal
laminated strip can be provided to cover
screw heads)

J5 Laminated joint. Main column edges
supplied laminated with a loose laminated
strip to cover screw heads.

Using the timber mullion as a spline offer the female enclosure (smaller joint internal dimension) so that the required amount of inner collar is revealed. Screw through the joint and into the mullion. Countersunk screws are required for this first section as the second section locates on top of the flange.

Offer the second half of the enclosure (male section) using a tourniquet to hold both halves into place, screwfix through joint into the timber mullion. Avoid the same drilling position as the female section

Insert feature joint cover strips to cover fixings and use a suitable mastic to hold into place. The feature joint is not a compression fit and will require mastic, a small self tapping screw can be used at the head and base to aid securing.